


- 1 METER: SBE-16 CTD/02/FLNTU SAMI pH SENSOR
- 2 METER: BIODEGRADABLE PLASTICS - JAMSTEC
- 2 METER: NORTEK SIGNATURE 500 ADCP

- 1 METER: SBE 37SMP TC, FLEX SBE 37SMP TC TFLEX
- 1 1/4" SAS
- 1 1/4" SAS
- 2 LINKS 1" CHAIN
- 1" SAS

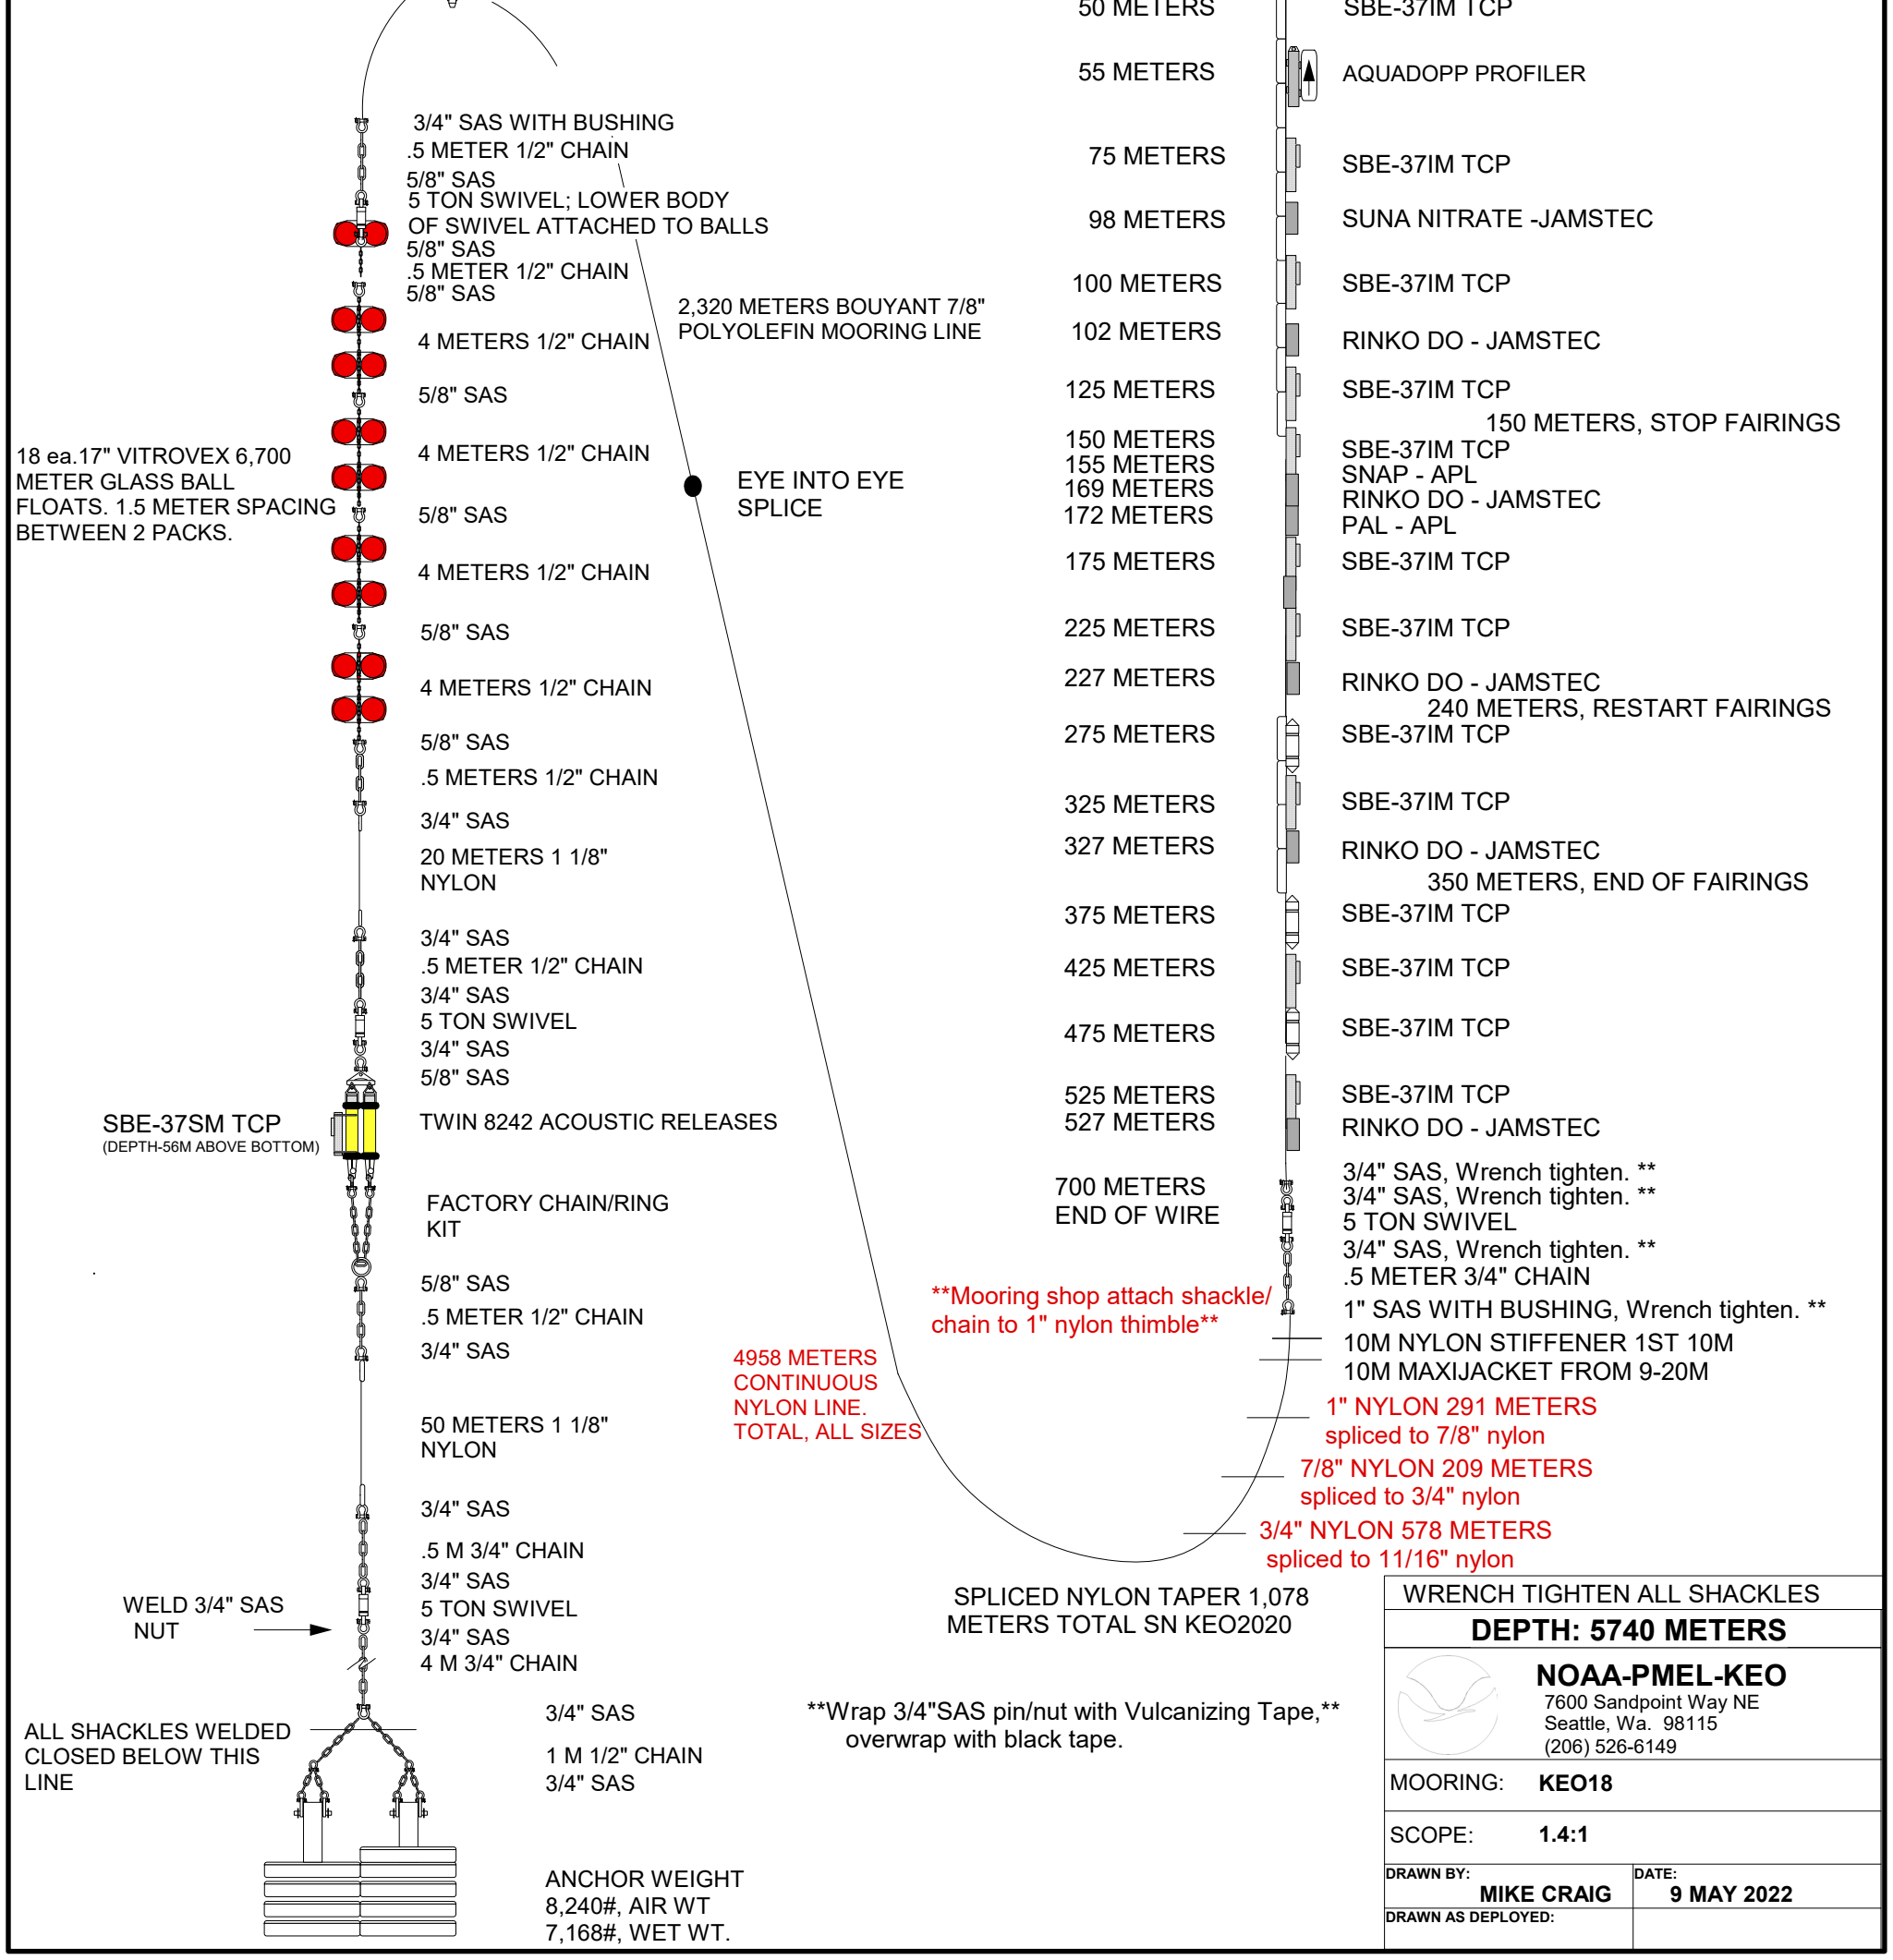

DEPTH (METERS)	INSTRUMENTS
5 METERS	INDUCTIVE CABLE BREAKOUT
5 METERS	TOP OF WIRE, START FAIRINGS
5 METERS	SBE-37IM TC
8.46 METERS	AQUADOPP
10 METERS	SBE-37IM TC
15 METERS	SBE-37IM TC
16.46 METERS	AQUADOPP
20 METERS	SBE-37IM TCP
25 METERS	SBE-37IM TC
35 METERS	SBE-37IM TC
36.46 METERS	AQUADOPP
40 METERS	SBE-37IM TCP
50 METERS	SBE-37IM TCP
55 METERS	AQUADOPP PROFILER
75 METERS	SBE-37IM TCP
98 METERS	SUNA NITRATE - JAMSTEC
100 METERS	SBE-37IM TCP
102 METERS	RINKO DO - JAMSTEC
125 METERS	SBE-37IM TCP
150 METERS	SBE-37IM TCP
155 METERS	SNAP - APL
169 METERS	RINKO DO - JAMSTEC
172 METERS	PAL - APL
175 METERS	SBE-37IM TCP
225 METERS	SBE-37IM TCP
227 METERS	RINKO DO - JAMSTEC
275 METERS	SBE-37IM TCP
325 METERS	SBE-37IM TCP
327 METERS	RINKO DO - JAMSTEC
375 METERS	SBE-37IM TCP
425 METERS	SBE-37IM TCP
475 METERS	SBE-37IM TCP
525 METERS	SBE-37IM TCP
527 METERS	RINKO DO - JAMSTEC
700 METERS	END OF WIRE

2,320 METERS BOUYANT 7/8" POLYOLEFIN MOORING LINE

EYE INTO EYE SPLICE

Mooring shop attach shackle/chain to 1" nylon thimble

4958 METERS CONTINUOUS NYLON LINE. TOTAL, ALL SIZES

SPLICED NYLON TAPER 1,078 METERS TOTAL SN KEO2020

Wrap 3/4" SAS pin/nut with Vulcanizing Tape, overwrap with black tape.

WRENCH TIGHTEN ALL SHACKLES	
DEPTH: 5740 METERS	
NOAA-PMEL-KEO 7600 Sandpoint Way NE Seattle, Wa. 98115 (206) 526-6149	
MOORING:	KEO18
SCOPE:	1.4:1
DRAWN BY:	MIKE CRAIG
DATE:	9 MAY 2022
DRAWN AS DEPLOYED:	

ALL SHACKLES WELDED CLOSED BELOW THIS LINE

ANCHOR WEIGHT
8,240#, AIR WT
7,168#, WET WT.